

Round and square freestanding couplers

Installation & Maintenance

Fitting Installation

Important: flush pipe work prior to installation to remove debris from the system, turn off water supply following system flushing.


1. Prepare the recess on the floor and pipework. See Fig 1.
2. Arrange the pipework so that the hot water is connected with the left, ensure sufficient pipe length, make sure the pipe end screw into the Body Seat (2) a minimum of 10mm. See Fig 1.
3. Hold the Body Seat (2) at the position inside the cavity and mark the screw holes. See Fig 1.
4. Drill the holes and install Anchoring Bolts (1) to the floor. Screw the fixing nuts of the Anchoring Bolts (1) clockwise until the thread length outside the floor of 12 mm (min). See Fig 2.
5. Remove the Spring Washer and Nut from the Anchoring Bolts (1), do not remove the flat washer.
6. Hold the Body Seat (2) in position inside the cavity, ensure that the thread of Anchoring Bolts fit through the hole of the Body Seat (2).
7. Fit Nut and Spring Washer to the Anchoring Bolts (1), tighten the nuts until secure. See Fig 3.
8. Connect the pipework to the Body Seat (2) until watertight.
9. Turn on the water supplies and check for leaks.
10. If watertight, turn off the water supplies, the floor should be finished and tiled. See Fig 4.
11. Remove the Adaptor (4) from the Body Seat (2) using a spanner.
12. Screw the nuts of the Rail assembly to Body Seat with Sealing Washer (3) until secure.

DO NOT OVERTIGHTEN.

13. Push Flange (5) down to floor until cover all joints.
14. Install the mixer to the Rail assembly, Ensure that the hot and cold supplies are correct. See Fig 5.
15. Turn on the hot and cold supplies, to check all joints and connections for leaks.

Round and square freestanding couplers

Installation & Maintenance

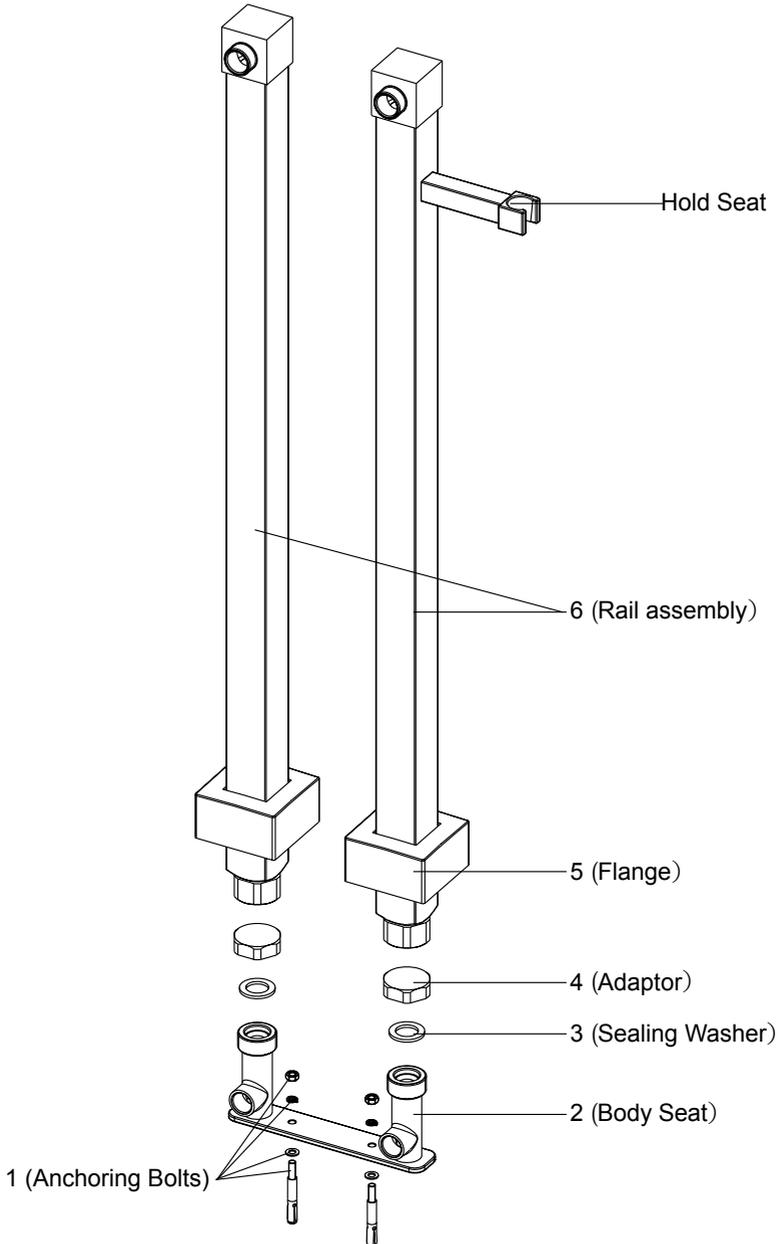

Round and Square freestanding couplers

Installation & Maintenance




Fig 1


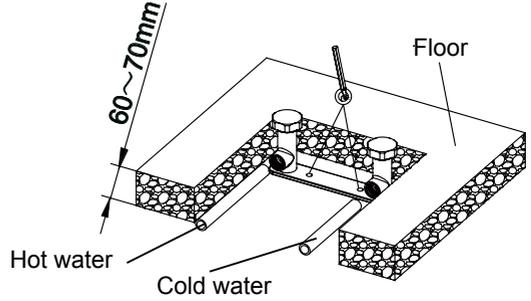


Fig 2


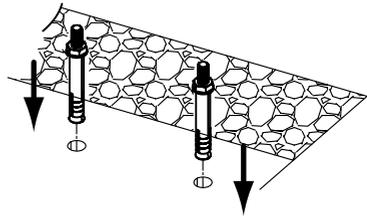


Fig 3






Fig 4

Round and Square freestanding couplers

Installation & Maintenance

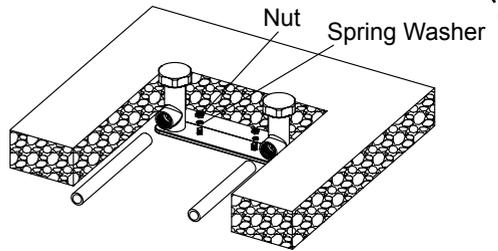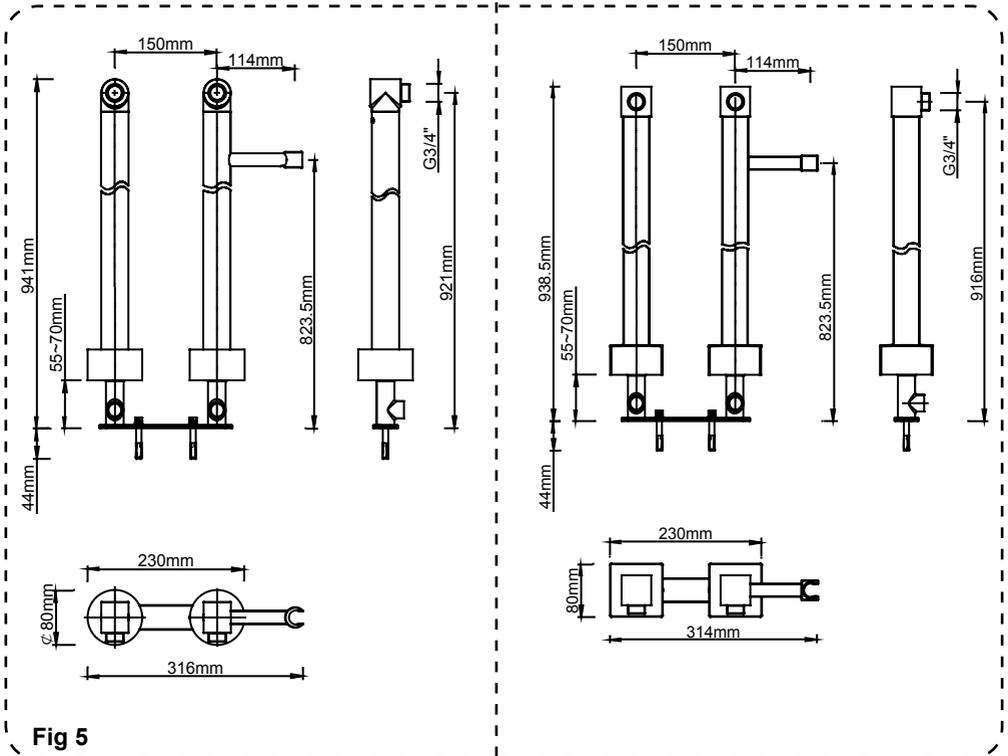

Maintenance

To maintain the appearance of this fitting, ensure it is cleaned using only a clean soft damp cloth. A solution of warm water and mild liquid detergent may be used where necessary and then rinsed thoroughly. Abrasive cleaners or acidic cleaners **MUST NOT BE USED** under any circumstances. Avoid contact with solvents.

Please retain these instructions for future reference.